CATV 1000MHz 18dB Push-Pull Amplifier Module

1. Product profile

1.1 General description

Hybrid high dynamic range amplifier module operating at a supply voltage of 24V(DC) in an SOT115J package.The module consists of two cascaded stages both in cascode configuration

CAUTION

This device is sensitive to Electro Static Discharge (ESD). Therefore care should be taken during transport and handling.

1.2 Features and benefits

- Excellent linearity
- Low noise
- Low return loss
- High gain

1.3 Applications

- CATV systems operating in the 40MHz to 1000MHz frequency range.

1.4 Quick reference data

Bandwidth 40MHz to 1000MHz; V_B = 24V; T_{mb} = 30 °C; Z_S = Z_L = 75Ω .

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
G_p	power gain	f = 50MHz	18.0	18.8	20.0	dB
		f = 1000MHz	18.7	-	-	dB
I_{tot}	total current	V_B = 24V	200	210	220	mA

2. Pin information

Pin	Description
1	input
2	common
3	common
5	+V_B
7	common
8	common
9	output

Simplified Outline



Graphic Symbol



3. Operating conditions

3.1 Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134) (TA = +25°C)

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V_B	-	25	V
Input Voltage [1]	Vi	-	60	dBmV
Operating Case Temperature	Tc	–20	+100	°C
Storage Temperature	Tstg	–40	+100	°C

[1] In case of single tone

3.2 Recommended operating conditions ($Z_S = Z_L = 75\Omega$)

Parameter	Symbol	Test Conditions	MIN	TYP	MAX	Unit
Supply Voltage	V_B		23.5	24.0	24.5	V
Operating Case Temperature	Tc		−20	+25	+85	°C

4. Electrical characteristics

(T_C = 30±5°C, V_B = 24V, $Z_S = Z_L = 75\Omega$)

Parameter	Symbol	Test Conditions	MIN	TYP	MAX	Unit
Power Gain	Gp	f = 50MHz	18.0	18.8	20.0	dB
Gain Slope	SL	f = 50MHz to 1000MHz	0.7	1.2	2.2	dB
Gain Flatness	FL	f = 50MHz to 1000MHz	–	–	±0.5	dB
Noise Figure	NF	f = 1000MHz	–	–	7.5	dB
Operating Current	IB	V_B=24VDC，RF OFF	200	210	220	mA
Composite Triple Beat	CTB	84channels, Flat output level across the band Vo=40dBmV at 743.25MHz,	–	−64	–	dB
Cross Modulation	XM		–	−65	–	dB
Composite 2nd Order Beat	CSO		–	−66	–	dB
Input Return Loss	S11	f = 40 to 700MHz	16	–	–	dB
		f = 700 to 1000MHz	14	–	–	
Output Return Loss	S22	f = 40 to 700MHz	14	–	–	dB
		f = 700 to 1000MHz	12	–	–	

5. Package outline

Rectangular single-ended package; aluminum flange; 2 vertical mounting holes; 2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads.

SOT115J

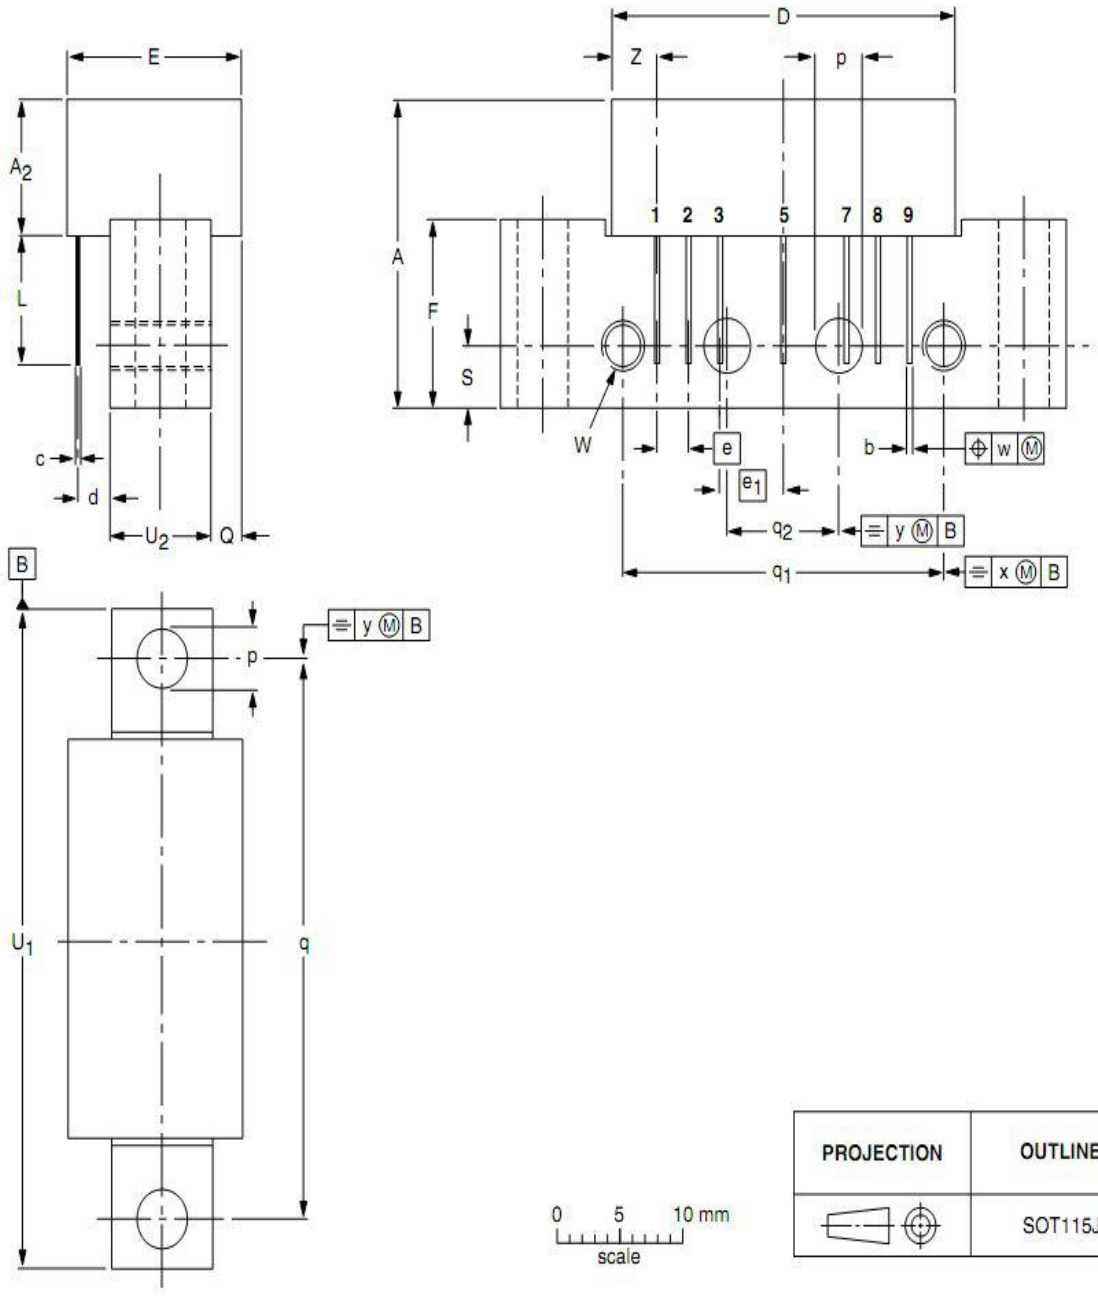

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A_2 max.	b	c	D max.	d max.	E max.	e	e_1	F	L min.	p	Q max.	q	q_1	q_2	S	U_1	U_2	W	w	x	y	Z max.
mm	20.8	9.1	0.51 0.38	0.25	27.2	2.54	13.75	2.54	5.08	12.7	8.8	4.15 3.85	2.4	38.1	25.4	10.2	4.2	44.75 44.25	8.2 7.8	6-32 UNC	0.25	0.7	0.1	3.8

UNIT: mm