# 65MHz CATV 25dB Reverse Amplifier Module

## 1. Product profile

### 1.1 General description

Hybrid high dynamic range amplifier module designed for applications in CATV systems. with a bandwidth of 5 MHz to 65 MHz operating at a voltage supply of 24 V (DC) in a SOT115J package.

**CAUTION**

This device is sensitive to Electro Static Discharge (ESD). Therefore care should be taken during transport and handling.

### 1.2 Features and benefits

- Excellent linearity
- Low noise
- Low return loss
- Rugged construction

### 1.3 Applications

- Reverse amplifier in two-way CATV systems.

### 1.4 Quick reference data

Bandwidth 5 MHz to 65 MHz; $V_B$ = 24 V; $T_{mb}$ = 30 °C; $Z_S$ = $Z_L$ = 75 Ω .

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| $G_p$ | power gain | f = 10 MHz | 24.5 | 25.0 | 26.0 | dB |
| $I_{tot}$ | total current | $V_B$ = 24 V | 135 | 150 | 165 | mA |

## 2. Pin information

| Pin | Description |
|---|---|
| 1 | input |
| 2 | common |
| 3 | common |
| 5 | +$V_B$ |
| 7 | common |
| 8 | common |
| 9 | output |

**Simplified Outline**




**Graphic Symbol**



# 3. Operating conditions

## 3.1 Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134) (TA = +25°C)

| Parameter | Symbol | Min | Max | Unit |
|---|---|---|---|---|
| Supply Voltage | $V_B$ | - | 25 | V |
| Input Voltage [1] | Vi | - | 65 | dBmV |
| Operating Case Temperature | Tc | –20 | +90 | °C |
| Storage Temperature | Tstg | –40 | +100 | °C |

**[1]** In case of single tone

## 3.2 Recommended operating conditions ($Z_S = Z_L = 75\ \Omega$)

| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|---|---|---|---|---|---|---|
| Supply Voltage | $V_B$ | | 23.5 | 24.0 | 24.5 | V |
| Operating Case Temperature | Tc | | −20 | +25 | +80 | °C |

# 4. Electrical characteristics

**($T_C$ = 30±5°C, $V_B$ = 24 V, $Z_S = Z_L$ = 75 Ω)** *0*

| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|---|---|---|---|---|---|---|
| Power Gain | Gp | f = 10 MHz | 24.5 | 25.0 | 26.0 | dB |
| Gain Slope | SL | f = 5 to 65MHz | -0.2 | 0.2 | 0.8 | dB |
| Gain Flatness | FL | f = 5 to 65 MHz | – | – | ±0.3 | dB |
| Noise Figure | NF | f = 65 MHz | – | 5.5 | 6.0 | dB |
| Operating Current | IB | VB=24VDC，RF OFF | 135 | 150 | 165 | mA |
| Composite Triple Beat | CTB | 4 channels, flat output level across the band VO = 50dBmV at 57.75 MHz, | – | −68 | – | dB |
| Cross Modulation | **XM** | | – | −66 | – | dB |
| Composite 2nd Order Beat | CSO | | – | −70 | – | dB |
| Input Return Loss | S11 | f = 5 to 65 MHz | 17 | – | – | dB |
| Output Return Loss | S22 | f = 5 to 65 MHz | 17 | – | - | dB |

## 5. Package outline

**Rectangular single-ended package; aluminum flange; 2 vertical mounting holes; 2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads.**

**SOT115J**

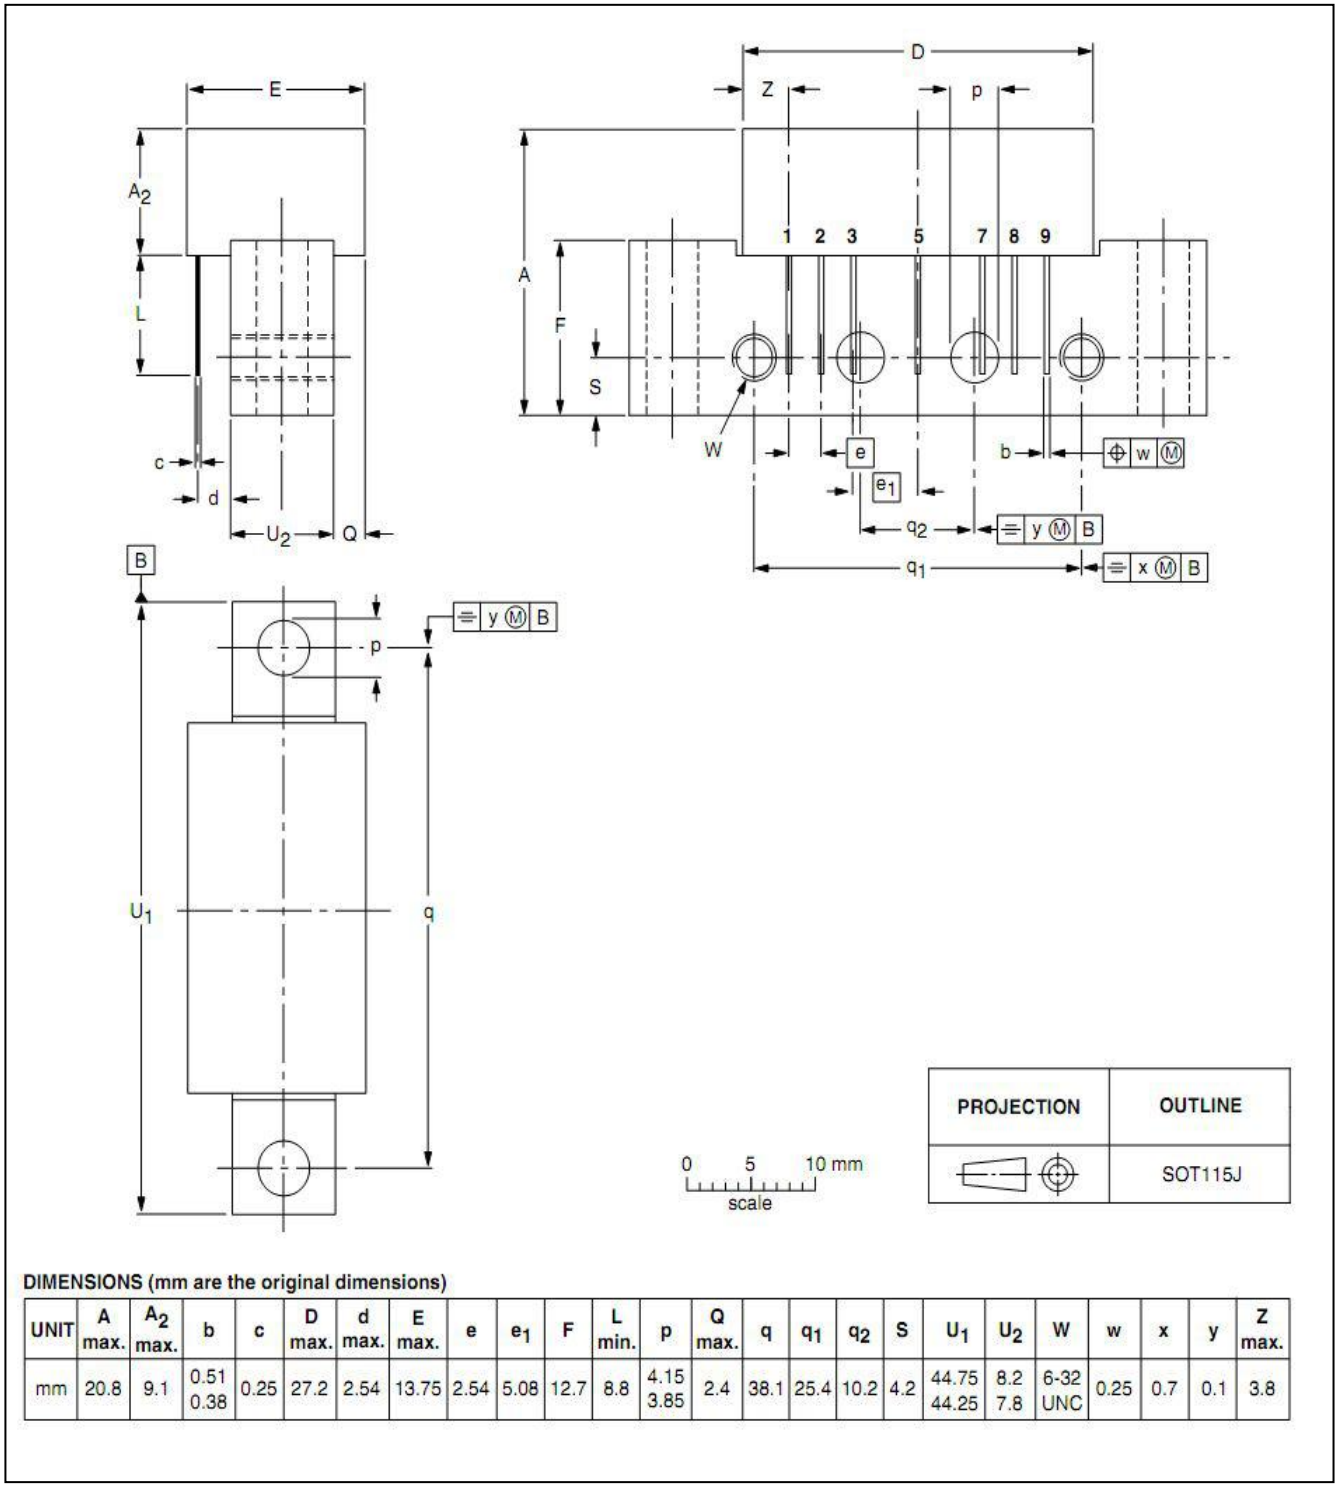


DIMENSIONS (mm are the original dimensions)

| UNIT | A max. | $A_2$ max. | b | c | D max. | d max. | E max. | e | $e_1$ | F | L min. | p | Q max. | q | $q_1$ | $q_2$ | S | $U_1$ | $U_2$ | W | w | x | y | Z max. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| mm | 20.8 | 9.1 | 0.51<br>0.38 | 0.25 | 27.2 | 2.54 | 13.75 | 2.54 | 5.08 | 12.7 | 8.8 | 4.15<br>3.85 | 2.4 | 38.1 | 25.4 | 10.2 | 4.2 | 44.75<br>44.25 | 8.2<br>7.8 | 6-32<br>UNC | 0.25 | 0.7 | 0.1 | 3.8 |

**UNIT: mm**